



Technology that works fast

TOSHIBA
AIR CONDITIONING

**Multi-Split
Systems**





Technology in Multi-Split Systems.

When it is necessary to provide a comfortable solution for a multi-room application, Toshiba's Multi-Split systems offer the ideal answer.

One outdoor unit is capable of operating 2, 3, 4 or 5 indoor units. They are compact and slimline and are designed to blend in with any room interior. In fact, Toshiba offers a wide range of different possibilities to create all the comfort you desire.



The full range of indoor units can satisfy every kind of need – it includes unobtrusive ducted units, console units and modern Hi-walls, that provide hi-tech and sophisticated design and effective air filtration at the same time. Moreover, the efficient inverter systems are composed of high quality components – control electronics, motor and compressor.

For Toshiba quality is a priority. Today and even tomorrow, this will be the real difference between us and many other air conditioning manufacturers. This is a philosophy that forms the basis of every air conditioner that leaves our production lines. No compromise – only quality.

When technology meets comfort.

Toshiba was the first company to incorporate inverter technology into air conditioning systems in 1981 and since then it has maintained a technological advantage over its competitors.

The development of the exclusive DC Hybrid Inverter system has reaffirmed this ability to innovate and maintain technological leadership in a fast-growing market. But for Toshiba, innovation also means a strong commitment to international institutions that carefully evaluate the impact of new technologies on our environment.

Toshiba combines technological development with care for future generations – the result is a range of energy-efficient air conditioners, reducing greenhouse gas emissions at the source.

Quiet

Comfortable

Powerful


Energy Saving

Luxury through flexibility & technology.

Toshiba's Multi-Split systems will deliver the ultimate in heating and cooling comfort. The very latest in air conditioning technology ensures optimum performance to enhance the quality of air in your room.





DC Twin-Rotary Compressor

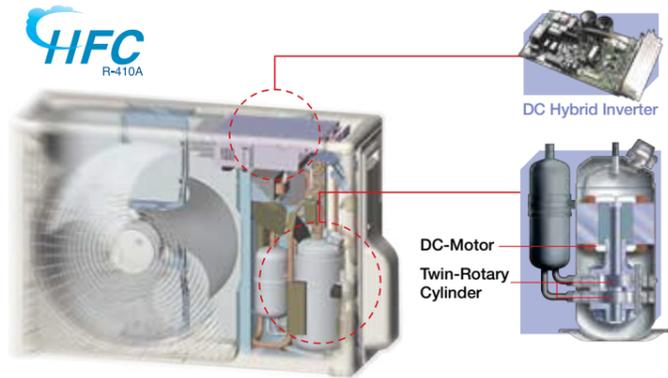

High efficiency.

Rotating with two rollers at the same time, makes accurate compressor rotation possible, with less energy loss. As a result, it offers a great reduction in energy consumption, yet with very powerful operation.

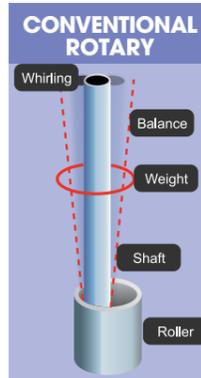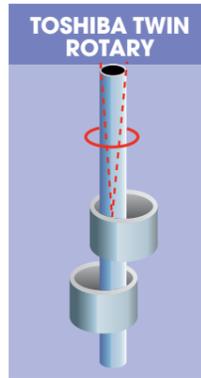


High reliability and low noise.

The enhanced DC Twin-Rotary Compressor delivers stable performance with minimum friction. Ideal for noise-sensitive applications. The sound of the outdoor unit is almost imperceptible.

A wide range of efficiency is realised.

This compressor enables the adoption of a high-pressure refrigerant. High efficiency is evident in low speed operation ranges. It can reduce energy consumption when operated in long stable conditions.

Inverter Hi-wall

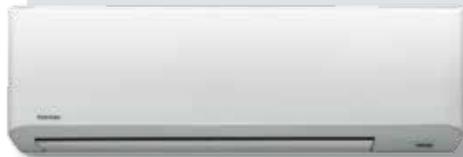

Discreet and unobtrusive, this Hi-wall delivers high energy efficiency and effective air purification. The inverter Hi-wall provides pure, fresh and healthy air and ensures comfort in your home.

- Extremely low noise levels
- High efficiency in cooling & heating
- Auto diagnosis and self cleaning function
- Modern flat panel

INDOOR			RAS-M07N3KV2-E	RAS-B10N3KV2-E	RAS-B13N3KV2-E	RAS-B16N3KV2-E	RAS-B22N3KV2-E	RAS-M24N3KV2-E
Cooling capacity	kW	CO	2.0 (1.4~2.5)	2.7 (1.4~3.2)	3.7 (1.4~4.2)	4.5 (1.4~4.9)	6.0 (2.4~6.8)	7.1 (2.4~7.2)
Heating capacity	kW	RC	2.7 (0.8~4.8)	4.0 (0.8~5.2)	5.0 (0.8~6.5)	5.5 (0.8~6.9)	7.0 (1.8~8.2)	8.1 (1.8~8.6)
Dimension (H x W x D)	mm		275 x 790 x 225	320 x 1050 x 243	320 x 1050 x 243			
Weight	Kg		10	10	10	10	13	13
Airflow	L/s	CO	143	143/90	156/90	191/103	300/172	315/187
		RC	158	158/106	175/106	206/116	305/187	320/203
Sound pressure (L/H)	dB(A)	CO	26-38	26-38	26-39	30-45	33-47	35-49
		RC	28-38	28-39	28-40	31-45	33-47	35-49
Liquid pipe size	mm	-	6.35	6.35	6.35	6.35	6.35	6.35
Gas pipe size	mm	-	9.52	9.52	9.52	12.70	12.70	12.70

Inverter Ducted



This ducted inverter unit offers reliable and controllable comfort year-round. These compact, quiet units are suitable for a wide range of residential and light commercial applications.

- Low noise levels
- Flexible air inlet – rear or below the unit
- Easy installation
- Slimline design

INDOOR			RAS-M10GDV-E	RASM13GDV-E	RAS-M16GDV-E
Cooling capacity	kW	CO	2.7 (1.4~3.2)	3.7 (1.4~4.2)	4.5 (1.4~4.9)
Heating capacity	kW	RC	4.0 (0.8~5.2)	5.0 (0.8~6.5)	5.5 (0.8~6.9)
Dimension (H x W x D)	mm		230 x 750 x 440	230 x 750 x 440	230 x 750 x 440
Weight	Kg		19	19	19
Airflow	L/S	CO	200/110	217/119	217/125
		RC	200/111	217/119	217/125
Sound pressure (L/H)	dB(A)	CO	23-31	24-32	25-33
		RC	24-32	25-33	26-34
Liquid pipe size	mm	-	6.35	6.35	6.35
Gas pipe size	mm	-	9.52	9.52	12.70

Inverter Cassette



This four way cassette has been designed to grant easy installation and maintenance. Its compact design blends with any room interior and makes it discreet and unobtrusive.

- Standard 600mm x 600mm grid
- Standard infra-red remote control
- Slimline dimensions for demanding installations
- Easy maintenance and installation

INDOOR			RAS-M10SMUV-E	RAS-M13SMUV-E	RAS-M16SMUV-E
Cooling capacity	kW	CO	2.7 (1.4~3.2)	3.7 (1.4~4.2)	4.5 (1.4~4.9)
Heating capacity	kW	RC	4.0 (0.8~5.2)	5.0 (0.8~6.5)	5.5 (0.8~6.9)
Dimension (H x W x D)	mm		268 x 575 x 575	268 x 575 x 575	268 x 575 x 575
Weight	Kg		17	17	17
Airflow	L/S	CO	163/120	171/120	183/125
		RC	163/120	171/120	183/125
Sound pressure (L/H)	dB(A)	CO	30-37	30-38	31-40
		RC	30-37	30-38	31-40
Liquid pipe size	mm	-	6.35	6.35	6.35
Gas pipe size	mm	-	9.52	9.52	12.70



Inverter Console



Consoles are an innovative and compact unit which can be installed on the floor or in low wall applications, perfect for under the window sills or in a low ceiling attic.

With a distinctive floor heating function, Toshiba inverters can deliver powerful flow at floor level for consistent and comfortable room heating.

Bi-flow – two outlets for complete personalised flow

Child lock function on unit display panel

Floor heating mode

Deodorising effect

INDOOR			RAS-B10UFV-A	RAS-B13UFV-A	RAS-B18UFV-A
Cooling capacity	kW	CO	2.7 (1.4~3.2)	3.7 (1.4~4.2)	5.0 (1.4~5.2)
Heating capacity	kW	RC	4.0 (0.8~5.2)	5.0 (0.8~6.5)	6.0 (0.8~7.1)
Dimension (H x W x D)	mm		600 x 700 x 220	600 x 700 x 220	600 x 700 x 220
Weight	Kg		16	16	16
Airflow	L/S	CO	130/60	142/63	167/90
		RC	142/60	153/60	178/90
Sound pressure (L/H)	dB(A)	CO	26-39	27-40	34-46
		RC	26-39	27-40	34-46
Liquid pipe size	mm	-	6.35	6.35	6.35
Gas pipe size	mm	-	9.52	9.52	12.70

Multi-Split Outdoor Unit



Toshiba Multi-Splits are equipped with Toshiba DC hybrid inverter, an enhanced feature that ensures improved performance and reliability.

Thanks to the efficient DC compressors, these units provide fast and precise temperature management, with high energy savings compared to fixed-speed systems.

Compact and lightweight outdoor unit

Up to 80m pipe run

KEY FEATURES

For wide range of applications.

A perfect combination of DC twin rotary compressor, DC Hybrid Inverter and R-410A refrigerant.


Superior reliability due to the reduction of the compressor ON/OFF cycles.

Compact, silent and lightweight.

Flexible – this system allows up to 25m piping length for one room.



Inverter Multi-Split Outdoor Units

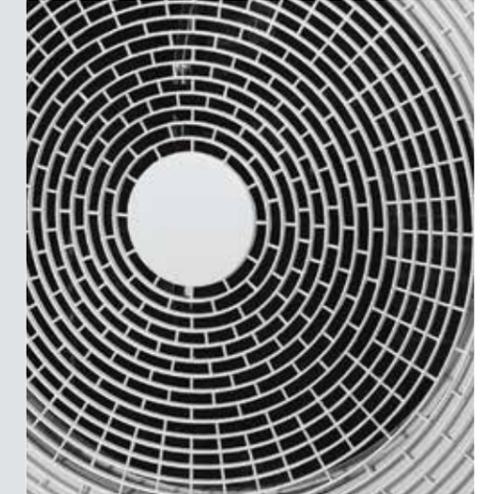

OUTDOOR			RAS-M18UAV-E	RAS-3M26UAV-E	RAS-4M27UAV-E	RAS-5M34UAV-E1
Number of indoor units			2 rooms	3 rooms	4 rooms	5 rooms
Cooling capacity - rated (min - max)	kW	CO	5.2 (1.40 ~6.20)	7.5 (4.10~9.00)	8.0 (4.20 ~ 9.30)	10.0 (3.70 ~ 11.00)
Heating capacity - rated (min - max)		RC	5.6 (1.04~ 8.30)	9.0 (2.0~11.20)	9.0 (2.90 ~ 11.70)	12.0 (2.70 ~ 14.00)
Dimension (H x W x D)	mm		550 x 780 x 290	890 x 900 x 320	890 x 900 x 320	890 x 900 x 320
Weight	Kg		41	69	69	75
EER / COP	Rated		3.61/4.71	3.75/4.09	3.50/4.67	3.42/4.24
Max pipe length	m		30	70	70	80
Max pipe per unit	m		20	25	25	25
Chargeless length	m		20	40	40	40
Max height difference	m		10	15	15	15
Sound pressure (H) at 1 metre	dB(A)		49(cool)/51(heat)	48(cool)/49(heat)	48(cool)/49(heat)	51(cool)/54(heat)
Refrigerant type			R410a	R410a	R410a	R410a
Compressor type			DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
Operating range	Celcius	Cooling	5~43	10~43	10~43	10~43
		Heating	-15 ~-24	-15 ~-22	-15 ~-22	-10 ~-22
Power supply	V/ph/Hz		220~240-1-50/220-1-60	220~240-1-50/220-1-60	220~240-1-50/220-1-60	220~240-1-50/220-1-60

Note: The capacity per indoor unit will vary in cases where the continuous and simultaneous operation of multiple indoor units are required. Care should be taken when sizing these applications. Please consult your Toshiba Specialist Dealer for more detailed information.

CO =Cooling only
RC = Reverse cycle



Notice: Toshiba is committed to continuously improving its product to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

All features and specifications are subject to change without prior notice.

Note: All images provided in this catalogue are used for illustration purposes only.

Part number: 1015-032014 Date: March 2014



TOSHIBA
AIR CONDITIONING

Sales and Service **13 COOL (13 2665)**
Level 1, 195 Chesterville Road
Moorabbin Vic 3189
ABN 47136426214
AU22499

toshiba-aircon.com.au